

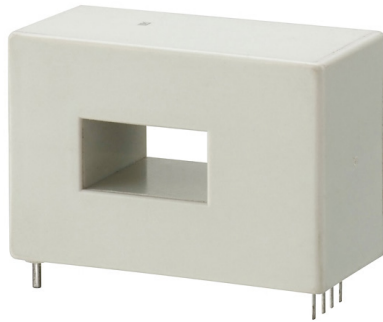


HC-PG



- Rated current 50A ~ 300A
- Superior noise-resistance
- Ferrite core specification also available (Rated current 50A ~ 100A)
- Single-power supplies also available
- For additional ±15V and ±12V products, contact sales@dgseals.com or click below




Applications

Inverters, Power supply equipment, NC machine tools

Dimensions

(mm)

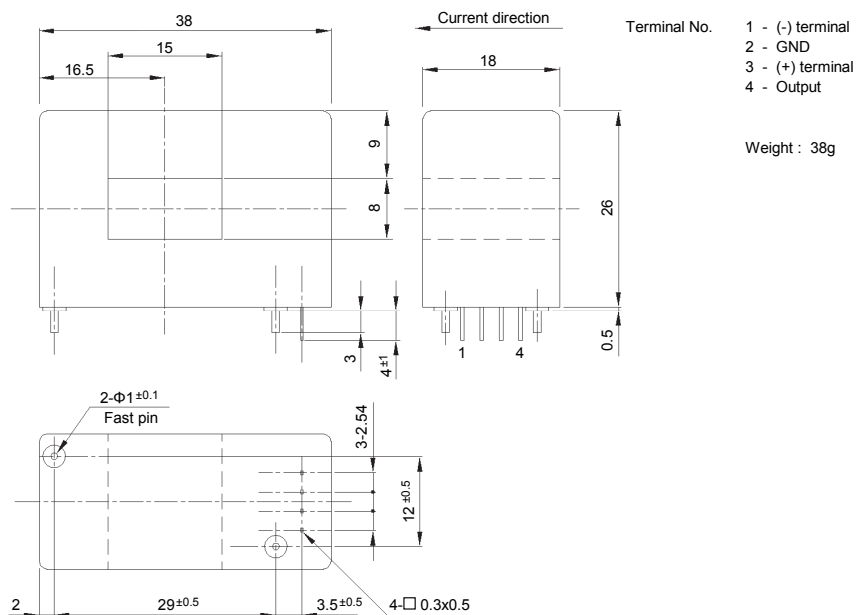

Specification

Ta=25°C

Type	HC-PG050V4B15	HC-PG100V4B15	HC-PG150V4B15	HC-PG200V4B15	HC-PG300V4B15
Rated current [If]	±50A	±100A	±150A	±200A	±300A
Saturation current [Is]	±150A	±300A	±450A	±600A	±900A
Linearity limits	0~±150A	0~±300A	0~±450A	0~±500A	0~±700A
Rated output [Vh]	±4V±1%				
Residual output [Vo]	Within ±50mV				
Output linearity	Within ±1%				
Response time	Within 10µs (The smaller one on either at di/dt = 100A/µs or If/µs.)				
Response performance	Within 10%				
Hysteresis voltage range	Within 100mV				
Output Temp. Coef.	Within ±0.1%/°C				
Residual output Temp. Coef.	Within ±4mV/°C	Within ±3mV/°C		Within ±2mV/°C	
Control power supply	±15V±5%				
Consumption current	Within 30mA				
Operating Temp.	-10°C~+80°C				
Storage Temp.	-15°C~+85°C				
Dielectric withstand voltage	2500V AC 50/60Hz 1minute				
Insulation resistance	Not less than 500MΩ 500V DC				

Note1) The indicated rated output is the one when no load is applied.


Note2) The indicated residual voltage is the one after the core hysteresis is removed.

Characteristics chart


HC-PG100V4B15

5µs/div. Time base


Pulse current response characteristic

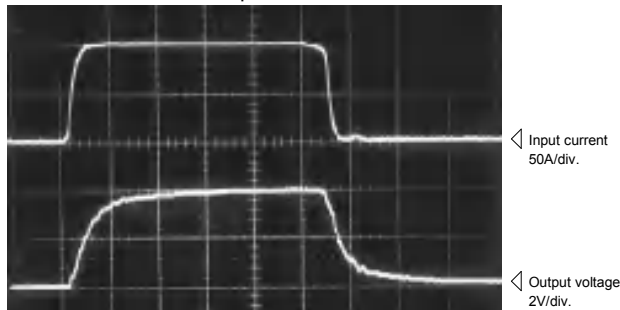

Noise characteristics (Effects of dv/dt)

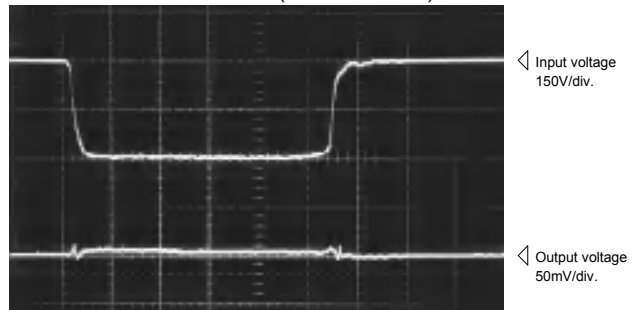


Noise characteristics (Effects of impulse noise)

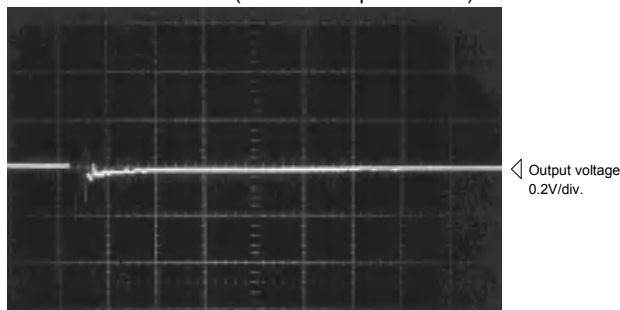

Input/output characteristics

Ta=25°C

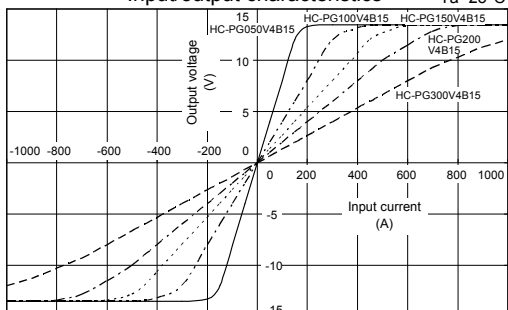

Note: The marks "◁" means 0V or 0A.